



LENS REMOVAL

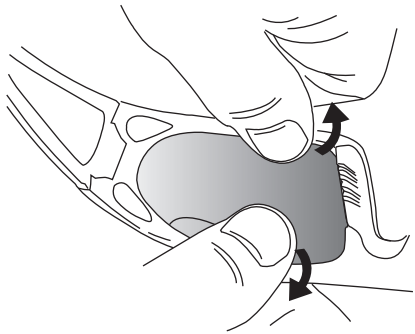


Place hands as pictured above with thumbs on the inside of the frame. Grasp the upper and lower portion of the frame and pull apart. When you feel the frame give, apply pressure with your thumbs on the lens.

LENS REMOVAL

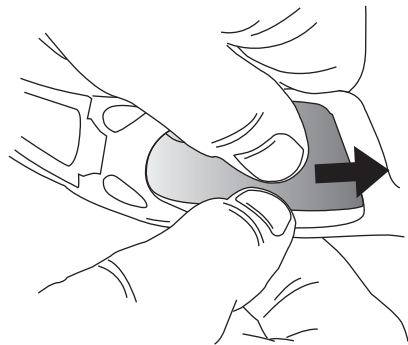


Push the lens out of the frame and slide lens toward nose bridge.

REPLACING THE LENS

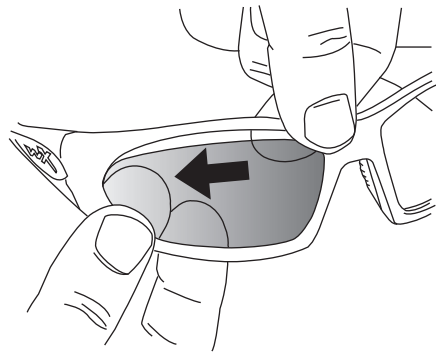

Replace the lens into the frame by positioning the temple edge of the lens into the frame. Be certain the edge of the lens is centered into lip of the frame.

REPLACING THE LENS

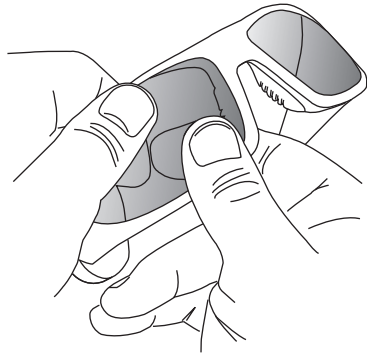

Press the edge of the lens into the frame as pictured above, "walking" the lens into the frame and finishing at the nose bridge. Double check to be certain the lens is seated evenly into the frame.